



NOTES:

THE CLASS 7 BASE MATERIAL SHALL BE BROUGHT UP
EVENLY IN LIFTS NOT TO EXCEED 4" (LOOSE MEASUREMENT)
AND COMPACTED WITH MECHANICAL EQUIPMENT TO AT LEAST
95% OF THE MAXIMUM DENSITY AS DETERMINED BY AASHTO
180.

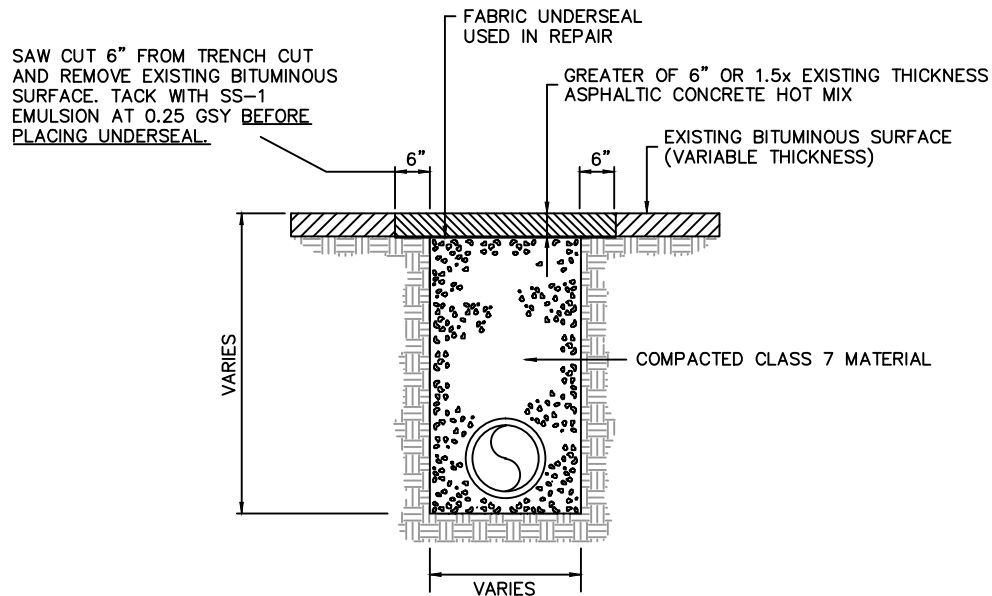

BITUMINOUS PAVEMENT REMOVAL
WITH
PERMANENT REPLACEMENT DETAIL

N.T.S.

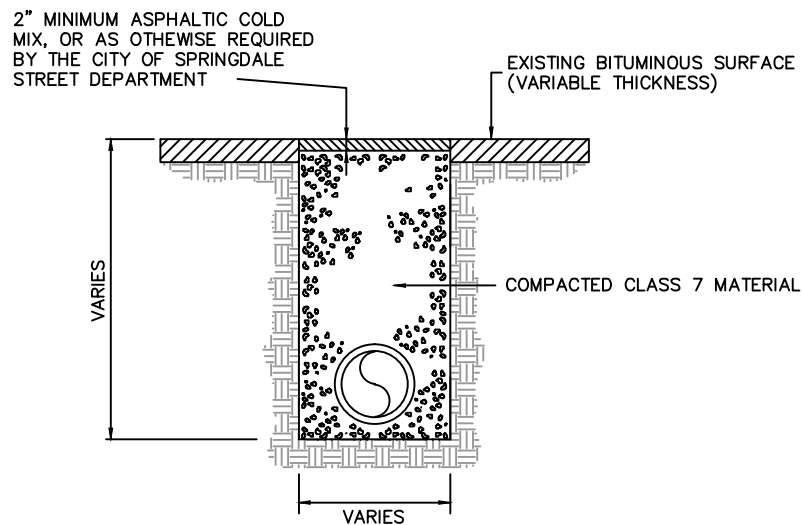

BITUMINOUS PAVEMENT REMOVAL
WITH
TEMPORARY REPLACEMENT

N.T.S.

SPRINGDALE
WATER UTILITIES

526 OAK AVENUE • P.O. BOX 769 • SPRINGDALE, ARKANSAS • 72765-0769 • (479) 751-5751

STANDARD DETAILS
FOR
WATER AND SEWER CONSTRUCTION

DRAWN BY: JNK

DRAWING NO: S-21

DATE: AUGUST 2014