



WIDTH OF STREET	WIDTH OF R.O.W.	C/L LOCATION OF SEWER MAIN	C/L LOCATION OF WATER MAIN	END LOCATION OF SEWER STUB-OUT	C/L LOCATION OF METER BOX (SHORT)	C/L LOCATION OF METER BOX (LONG)
30'	50'	15' BOC	12' BOC	25' BOC	17' BOC	20' BOC
36'	60'	17' BOC	14' BOC	27' BOC	19' BOC	22' BOC
48'	70'	16' BOC	13' BOC	26' BOC	18' BOC	21' BOC
60'	80'	15' BOC	12' BOC	25' BOC	17' BOC	20' BOC

NOTE:  
CONSULT SWU ENGINEERING DEPT. FOR  
ADDITIONAL LOCATION DIMENSIONS WHEN  
R.O.W. IS GREATER THAN 80' IN WIDTH OR  
WHEN WIDTH OF SIDEWALK OR WIDTH OF  
GREENSPACE VARIES FROM TYPICAL.

(\*) PIPE SIZE    MIN DEPTH  
6"-10"            36"  
12"-14"           48"  
16" AND UP      60"

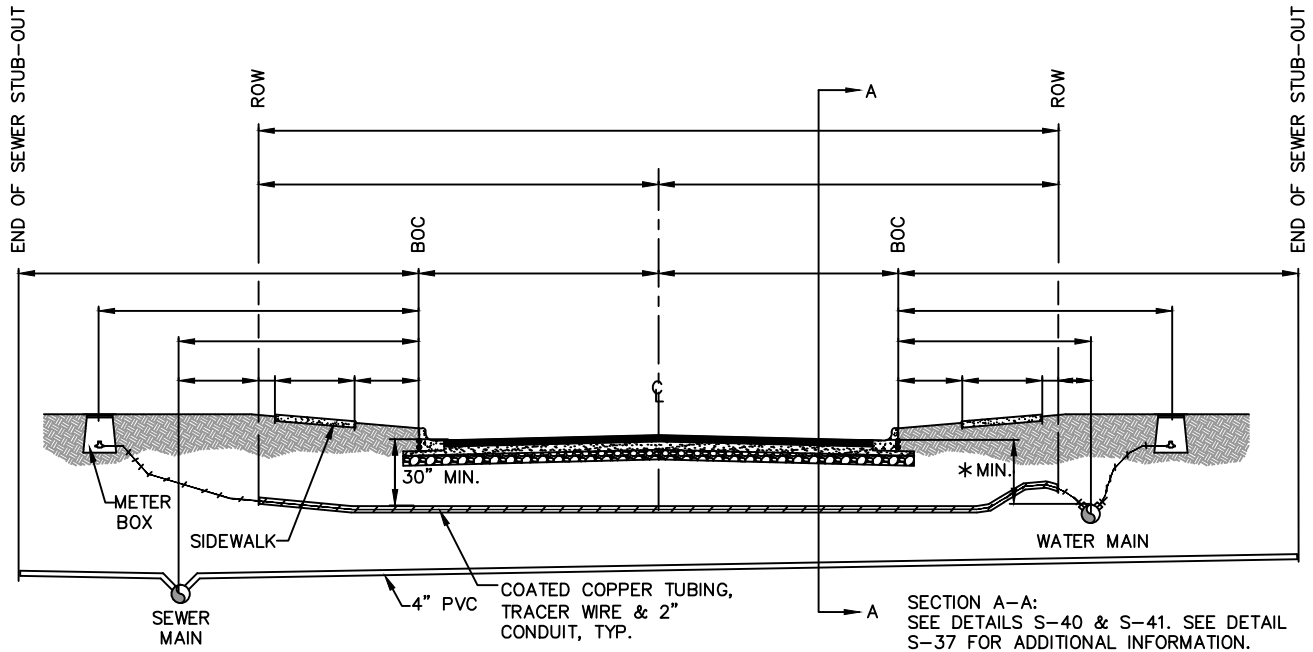

NOTE:  
CONDUIT SHALL EXTEND FROM  
R.O.W. TO R.O.W.

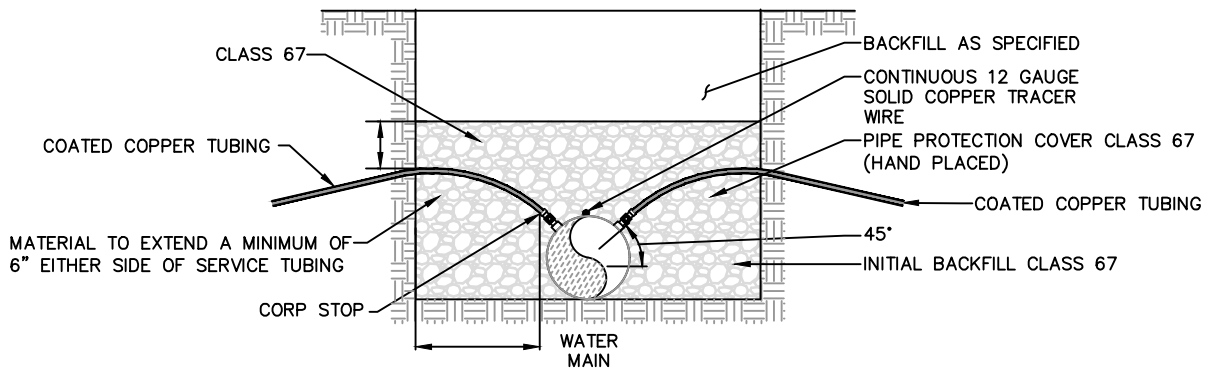

### TYPICAL LOCAL STREET SECTION/LAYOUT

30' WIDTH SHOWN (SEE CHART FOR 36', 48' & 60' WIDTHS)

N.T.S.  
S-29



526 OAK AVENUE • P.O. BOX 769 • SPRINGDALE, ARKANSAS • 72765-0769 • (479) 751-5751

STANDARD DETAILS  
FOR  
WATER AND SEWER CONSTRUCTION

DRAWN BY: JSB

DRAWING NO: S-29

DATE: AUGUST, 2025